



Terminations

		DC - 1.	5 GHz				
Model Number	Material			Power Rating	DE 0		
	Body	Connector	Contact	(W)	RF Connector		
TER-N50F-900036	Aluminium	Stainless Steel	Gold Plated	150 W	50 ohm, Female N-Type		
DC - 3 GHz							
Model Number		Material		Power Rating	RF Connector		
	Body	Connector	Contact	(W)			
TER-F75M-985001	Nickel plated	Nickel plated	Copper wire lead with matte tin plating	0.25 W	75 ohm, Male F-Type		
		DC - 4	GHz				
Model Number		Material		Power Rating (W)	RF Connector		
Wiodel Number	Body	Connector	Contact				
TER-B50M-9803	Brass	Brass	Brass with gold plating	1 W	50 ohm, Male BNC		
WA1423-4	Aluminium	Passivated stainless steel	Gold plated beryllium copper or stainless steel	50 W	50 ohm, Male N-Type		
DC - 6 GHz							
Model Number	Material			Power Rating	DE Connector		
					DE Connector		
	Body	Connector	Contact	(W)	RF Connector		
TER-S50F-900021	Body	Connector Passivated stainless steel	Contact Gold plated beryllium copper		SF Connector 50 ohm, Female SMA		
	•	Passivated stainless	Gold plated beryllium	(W)			
TER-S50F-900021	Aluminium	Passivated stainless steel Passivated stainless	Gold plated beryllium copper Gold plated beryllium	(W) 5 W	50 ohm, Female SMA		
TER-S50F-900021 TER-S50M-900024	Aluminium	Passivated stainless steel Passivated stainless steel Passivated stainless	Gold plated beryllium copper Gold plated beryllium copper Gold plated beryllium	(W) 5 W 5 W	50 ohm, Female SMA 50 ohm, Male SMA		
TER-S50F-900021 TER-S50M-900024 TER-N50F-900157	Aluminium Aluminium Aluminium	Passivated stainless steel Passivated stainless steel Passivated stainless steel Passivated stainless	Gold plated beryllium copper Gold plated beryllium copper Gold plated beryllium copper Gold plated beryllium	(W) 5 W 5 W	50 ohm, Female SMA 50 ohm, Male SMA 50 ohm, Female N-Type		
TER-S50F-900021 TER-S50M-900024 TER-N50F-900157 TER-S50M-900023	Aluminium Aluminium Aluminium Aluminium	Passivated stainless steel Passivated stainless steel Passivated stainless steel Passivated stainless steel	Gold plated beryllium copper Gold plated beryllium copper Gold plated beryllium copper Gold plated beryllium copper Gold plated beryllium copper	5 W 5 W 5 W	50 ohm, Female SMA 50 ohm, Male SMA 50 ohm, Female N-Type 50 ohm, Male SMA		
TER-S50F-900021 TER-S50M-900024 TER-N50F-900157 TER-S50M-900023 TER-N50M-9854	Aluminium Aluminium Aluminium Aluminium	Passivated stainless steel Brass	Gold plated beryllium copper Gold plated beryllium copper Gold plated beryllium copper Gold plated beryllium copper Gold plated beryllium copper	(W) 5 W 5 W 5 W 10 W 100 W	50 ohm, Female SMA 50 ohm, Male SMA 50 ohm, Female N-Type 50 ohm, Male SMA 50 ohm, Male N-Type		
TER-S50F-900021 TER-S50M-900024 TER-N50F-900157 TER-S50M-900023	Aluminium Aluminium Aluminium Aluminium	Passivated stainless steel Passivated stainless steel Passivated stainless steel Passivated stainless steel Brass DC - 8	Gold plated beryllium copper Gold plated beryllium copper Gold plated beryllium copper Gold plated beryllium copper Gold plated beryllium copper	(W) 5 W 5 W 5 W 10 W	50 ohm, Female SMA 50 ohm, Male SMA 50 ohm, Female N-Type 50 ohm, Male SMA		
TER-S50F-900021 TER-S50M-900024 TER-N50F-900157 TER-S50M-900023 TER-N50M-9854	Aluminium Aluminium Aluminium Aluminium Aluminium	Passivated stainless steel Passivated stainless steel Passivated stainless steel Passivated stainless steel Passivated stainless steel Brass DC - 8	Gold plated beryllium copper Gold plated beryllium copper Gold plated beryllium copper Gold plated beryllium copper Brass with gold plating	(W) 5 W 5 W 5 W 10 W 100 W	50 ohm, Female SMA 50 ohm, Male SMA 50 ohm, Female N-Type 50 ohm, Male SMA 50 ohm, Male N-Type		









V 2.4 E&OE www.etlsystems.com





Terminations

		DC - 1	1 GHz		
Model Number	Material			Power Rating	
	Body	Connector	Contact	(W)	RF Connector
JP300024	Brass, nickel plated	Brass, nickel plated	Brass, gold plated	0.5 W	50 ohm, Female N-Type
TER-N50M-9823	Brass	Brass	Brass	1 W	50 ohm, Male N-Type
		DC - 1	2 GHz		
Model Number	Material			Power Rating	RF Connector
	Body	Connector	Contact	(W)	RF Connector
TER-B75M-9825	Brass, nickel plated	Brass, nickel plated	Brass, gold plated	0.25	75 ohm, Male BNC
		DC - 1	8 GHz		
Model Number	Material			Power Rating	DE Connector
	Body	Connector	Contact	(W)	RF Connector
TER-S50F-900002	Passivated Stainless Steel	Passivated Stainless Steel	Gold plated beryllium copper	1 W	50 ohm, Female SMA
TER-N50M-9850	Tri-Metal Plated Brass	Tri-Metal Plated Brass	Brass, gold plated	2 W	50 ohm, Male N-Type
TER-S50M-9802	Brass, gold plated	Brass, gold plated	Brass, gold plated	2 W	50 ohm, Male SMA
TER-S50F-900123	Passivated Stainless Steel	Passivated Stainless Steel	Gold plated beryllium copper	2 W	50 ohm, Female SMA
TER-N50F-900155	Aluminium	Passivated stainless steel	Gold plated beryllium copper	5 W	50 ohm, Female N-Type
TER-N50M-900155	Aluminium	Passivated stainless steel	Gold plated beryllium copper	5 W	50 ohm, Male SMA
TER-S50M-900028	Aluminium	Passivated stainless steel	Gold plated beryllium copper	5 W	50 ohm, Male SMA
TER-S50F-900026	Aluminium	Passivated stainless steel	Gold plated beryllium copper	5 W	50 ohm, Female SMA
TER-S50M-900027	Aluminium	Passivated stainless steel	Gold plated beryllium copper	10 W	50 ohm, Male SMA
TER-S50F-900025	Aluminium	Passivated stainless steel	Gold plated beryllium copper	10 W	50 ohm, Female SMA
		DC - 26	5.5 GHz		
Model Number	Material			Power Rating	RF Connector
Model Number	Body	Connector	Contact	(W)	VL COHHECIOL
TER-S50M-9843	Passivated stainless steel	Passivated stainless steel	Brass, gold plated	1 W	50 ohm, Male SMA
TER-G50M-900113	Passivated stainless steel	Passivated stainless steel	Gold plated beryllium copper	2 W	50 ohm, Male 3.5mm





Marine Oil & Gas



SNG & VSAT









Terminations

TER-G50F-900114	Passivated stainless steel	Passivated stainless steel	Gold plated beryllium copper	2 W	50 ohm, Female 3.5mm	
DC - 40 GHz						
Model Number	Material			Power Rating	DE Connector	
	Body	Connector	Contact	(W)	RF Connector	
TER-K50M-9853	Aluminium	Brass gold plated or stainless steel	Brass Gold Plated	2 W	50 ohm, Male 2.92mm	
TER-K50F-900112	Aluminium	Stainless steel	Gold Plated Beryllium Copper	2 W	50 ohm, Female 2.92mm	

Examples:


TER-N50F-900036 Dimensions

57.154.25 (2.25e/-.01) 38.122.5 (1.50e/-.10) 66.282.5 (3.75e/-.10) 80.0 52 (3.15) (3.15) (6.22 LMC-28)THRU 1 ST FEM 4 HOLES EACH END

TER-N50F-900036




TER-F75M-985001 Dimensions

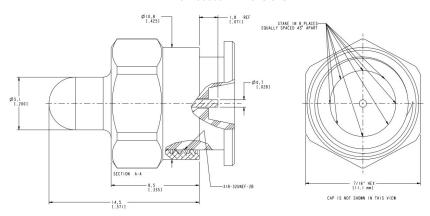

TER-F75M-985001



TER-N50M-985002 Dimensions



TER-B50M-9803



Broadcast



Marine Oil & Gas



SNG & VSAT



Satellite Teleport

