




ETL Systems
New technologies
in RF distribution

ODU-3014

IP65 ODU Variable Gain Amplifier

850-2450MHz

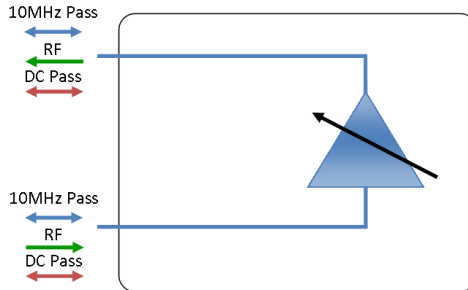

24V
Inline DC
powering

Compact
Housed in
rugged compact
IP65 enclosure*

850-2450 MHz
Operating frequency
range.

**Flexible
Mounting**
Tapped screw &
through hole
mounting options



RF Parameters			
ODU-3014	S5S5	N5N5	F7F7
Frequency Range	850 - 2450 MHz		
RF Connectors	50Ω SMA	50Ω N-Type	75Ω F-Type
Gain* (dB)	0 to 30	0 to 30	0 to 30
Gain vs Freq. variation (dB)	Typ	± 0.8	± 1.2
	Max	± 1.2	± 1.5
Input Return Loss (dB)	Typ	20	14
	Min	14	9
Output Return Loss (dB)	Typ	20	14
	Min	14	9
Output P1dB GCP** (dB)	Typ	15	15
	Min	12	12
Output IP3 (dBm)	Typ	30	30
Noise Figure (dB)	Typ	9	9

* Gain accuracy up to ± 1.5 dB for 50 ohm & up to ± 3 dB for 75 ohm
** Gain Compression Point



Environmental	
Operating Case Temperature	-10° C to +65° C
Storage Temperature	-20° C to +85° C
Location	Indoor / Outdoor IP65* Use
Humidity Max	95% non-condensing
Altitude Max	10,000 feet


Max Operating Parameters	
Input RF Power	+24dBm (40mW)
DC Voltage	24V on any RF port
DC Current	500mA

*IP65 integrity is maintained by populating all ports with sufficiently rated connectors and that unused ports have IP65 terminators or dust caps when awaiting connection. Dust caps are not sold with this product.

! Operation beyond these limits may cause instantaneous and permanent damage.

Gain Setting							
Switch Settings	1	2	3	4	5	6	Notes
Attenuation	16	8	4	2	1	n/a	Attenuation settings when the selected switch is at ON state
Max Gain	1	1	1	1	1	n/a	Max gain (0dB attenuation setting)
Min Gain	0	0	0	0	0	n/a	Min gain (31dB attenuation setting)

Physical Dimensions (mm)

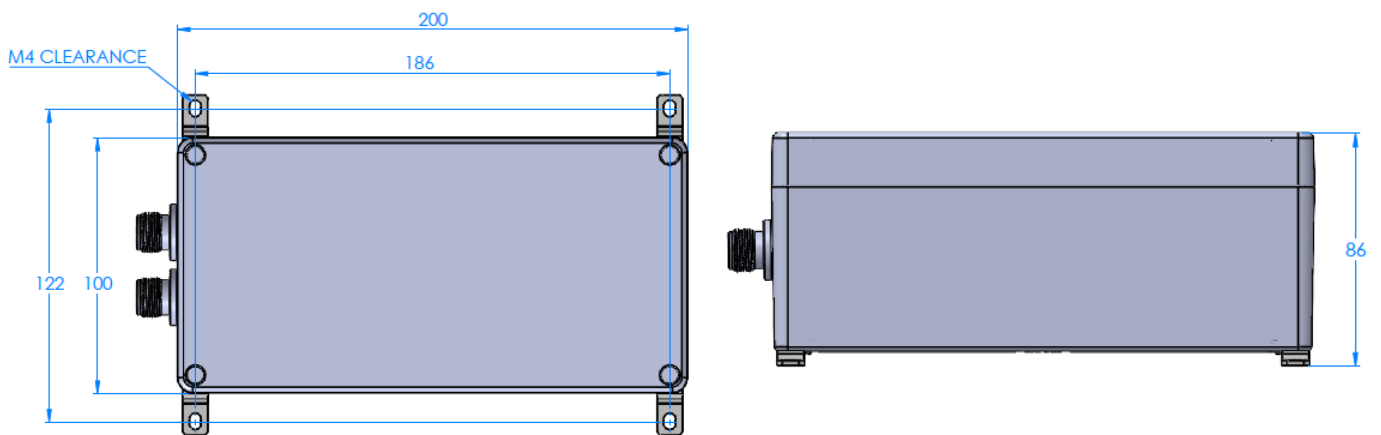

Note 1: The specification is subject to regular reviews and will be updated from time to time as part of our continuing product development and improved spec accuracy.
 Note 2: Operation beyond the quoted limits stated above may cause instantaneous and permanent damage.

