



Model Number:  
**F-BPL1-7059**


RF Components

# L-Band Cavity Bandpass Filter

1525 – 1559 MHz



## Physical Dimensions

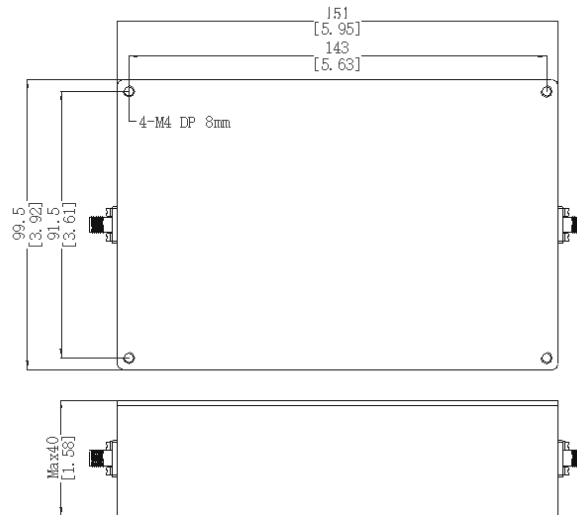

# Filter

RF Parameters	
F-BPL1-7059	S5S5
Frequency Range	1525—1559 MHz
RF Connectors	50Ω SMA
Insertion Loss (dB) Max	0.3
Return Loss (dB) Min	15
Power Handling (W)	50
Rejection	≥100dB @ DC-1000 MHz ≥70dB @ 1750-1900 MHz

Environmental	
Operating Temperature	-45°C to +85°C
Storage Temperature	-55°C to +95°C
Location	For Indoor or outdoor use
IP rating	IP 65

### Broadcast



### Marine Oil & Gas



### SNG & VSAT



### Satellite Teleport






Model Number:  
**F-BPL1-7059**

RF Components

# L-Band Cavity Bandpass Filter

1525 – 1559 MHz

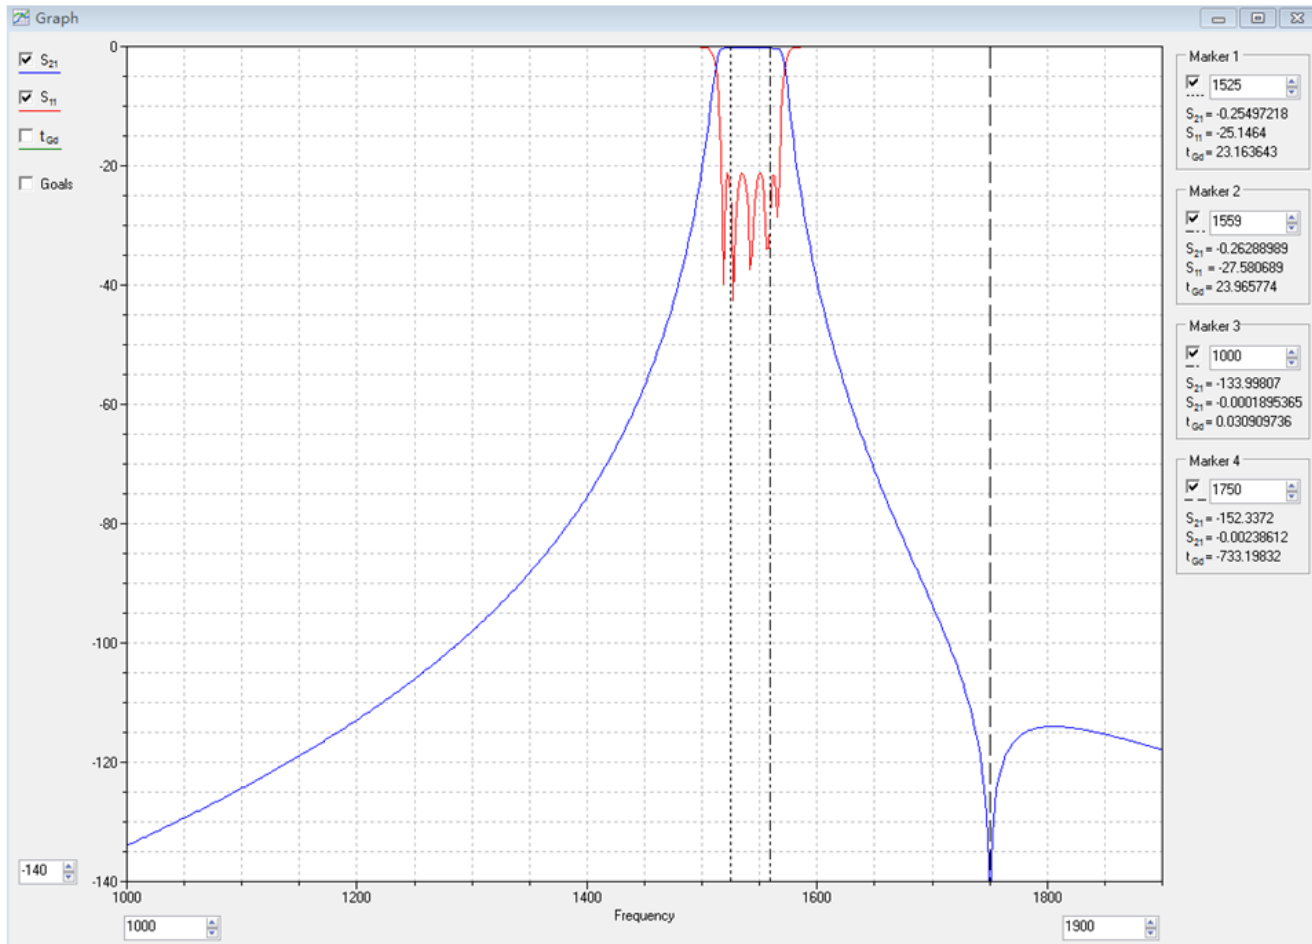

## Broadcast



## Marine Oil & Gas



## SNG & VSAT



## Satellite Teleport

