



**ETL Systems**  
New technologies  
in RF distribution

Model Number:  
SRY-G1S-TS2-179-xxxx  
SRY-G1S-RS2-180-xxxx

# StingRay RF Over Fibre Genus Module


## L-band modules with 22KHz and 13V/18V switchable LNB power

### Typical applications:

- Teleports & Earth Stations
- Satellite Operations
- Government & Defence applications
- Telemetry, Tracking & Command
- High Resilience applications

StingRay L-band Transmit and Receive RF Over Fibre modules to fit Genus 1U chassis or ODU. The transmit module can provide LNB power 13/18VDC, 22kHz tone up to 500 mA. When fitted with a 10 MHz distributing module the TX/RX module can inject an external or internal 10 MHz tone onto the L-band feed.

### Fibre Module

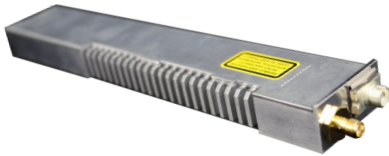

#### Fibre Module

Compact form factor allowing multiple modules to be housed in the Genus chassis. Each module occupies 1 slot in the chassis.



**TX & RX** module options to transmit and receive signals up to 10 km



**850 - 2450 MHz** operating frequency range



**Hot Swap & replaceable** RF module



**LNB Powering** 13/18V on TX modules only



**High isolation** between modules for signal quality

### Chassis Options



**Local control & monitoring** via HMI high resolution touchscreen



**Flexible Module Configurations** choose from a mixture of fibre modules with different operating frequencies.



**Resilience** from dual redundant hot -swap power supplies & field replaceable CPU & HMI



**Remote control & monitoring** via RJ45 Ethernet port with SNMP & web browser interface



**Compact indoor & outdoor** chassis options, which can be part populated



**Field replaceable Internal 10MHz reference source** and external reference inject port with auto detection (optional)



**Secure protocols** with SNMPv3 and HTTPS



Indoor Chassis



Outdoor Unit





| StingRay TX & RX Module - RF Parameters |   |  |                       |
|---|---|--|-----------------------|
| Model Numbers                           | SRY-G1S-TS2-179   | SRY-G1S-RS2-180  |                       |
| Frequency Range                         | 850-2450 MHz  |  |                       |
| Flatness (dB)                           | 850 to 2150 MHz   | ±1.5 dB, Fixed gain mode   |                       |
|   | 2150 to 2450 MHz  | ±2.0 dB, Fixed gain mode   |                       |
|   | any 36MHz   | ±0.25 dB, Fixed gain mode  |                       |
| Return Loss (dB)                        | 50 ohm SMA  | 18 dB typ., 14 dB min  | 18 dB typ., 14 dB min |
|   | 50 ohm BNC  | 18 dB typ., 14 dB min  | 18 dB typ., 14 dB min |
|   | 75ohm BNC   | 14 dB typ., 10 dB min  | 16 dB typ., 12 dB min |
|   | 75 ohm F-type   | 14 dB typ., 10 dB min  | 16 dB typ., 12 dB min |
| Gain Setting Modes                      | Manual Gain Control (MGC)<br>Automatic Gain Control (AGC)<br>Fixed Gain (FG)  |  |                       |
| Manual Gain Range                       | 60 dB in 0.5 dB steps<br>The MGC gain mode allows link optimisation for better Noise or Distortion performance  | -  |                       |
| Output AGC flatness                     | ±2.0 dB over full band. Input -10 to -40 dBm  |  |                       |
| OIP3                                    | 850 to 2150MHz  | Typical 23 dBm, Worst Case 20 dBm<br><b>Test condition:</b> 1m fibre, 10 dB gain, -23 dBm tones  |                       |
|   | 2150 to 2450MHz   | Typical 20 dBm, Worst Case 17 dBm<br><b>Test condition:</b> 1m fibre, 10 dB gain, -23 dBm tones  |                       |
| CNR (in any 36 MHz)                     | Typical -50 dB, Worst Case -45 dB<br><b>Test condition:</b> 1m fibre, -10 dBm RF i/p power, -10 dBm RF o/p total power.   |  |                       |
| Noise Figure                            | Typical 9 dB, Worst Case 12 dB<br><b>Test condition:</b> 1m fibre, -50 dB RF i/p power, -10 dBm o/p power   |  |                       |
| Group Delay Variation                   | <2ns over full band. <0.5ns over any 36MHz.   |  |                       |
| SFDR                                    | 850 to 2150MHz  | 107 dB/Hz <sup>2/3</sup> typ., 102 dB/Hz <sup>2/3</sup> min<br><b>Test condition:</b> 1m fibre, 10 dB gain, -23 dBm tones  |                       |
|   | 2150 to 2450MHz   | 103 dB/Hz <sup>2/3</sup> typ., 98 dB/Hz <sup>2/3</sup> min<br><b>Test condition:</b> 1m fibre, 10 dB gain, -23 dBm tones   |                       |
| RF Signal Range                         | <b>Input:</b> -70 to -10 dBm (total power) Operational i/p range (Note that all Specifications are only 'typical' between -60 & -70 dBm unless otherwise detailed). | <b>Output:</b> -70 to -10 dBm (total power) o/p range available under all i/p conditions. (Note that all Specifications are only 'typical' between -60 & -70 dBm unless otherwise detailed). |                       |
| Max RF input                            | +16 dBm total power. Damage level, NOT operational.   |  |                       |
| 10 MHz level at output                  | -10 to +10 dBm. User settable level via the chassis. Accuracy ±2 dB   | -10 to +10 dBm. User settable level via the chassis. Accuracy ±2 dB  |                       |
| 10MHz isolation                         | -40 dB. Between adjacent modules in same chassis  |  |                       |
| Laser Type                              | DFB. Optical isolator for improved performance  |  |                       |
| Optical Wavelength                      | 1310 ± 10 nm  | 1100 to 1650nm. Optimised for 1310nm and 1550 nm   |                       |
| Optical Power                           | <b>Output:</b> 4.5 ±2.5 dBm. 3.8 dBm typical  | <b>Input:</b> 0 to 4.5 dBm. Max +10 dBm  |                       |
| Optical Connectors                      | FC/APC , SC/APC<br>Single mode fibre. Use angle polish connectors only  |  |                       |
| Module Dimensions                       | 19mm x 38mm x 253mm. 0.2kg. Genus 1U series mountable.  |  |                       |
| Power Consumption                       | 15W Typical. With 18V 500 mA LNB Power.   | 4 W Typical  |                       |
| LNB Power                               | 18/13V ±5 %, 500 mA max   | -  |                       |
| Module Swap                             | Hot swap  |  |                       |
| MTBF                                    | >200,000 hours.   |  |                       |

Note 1: The specification is subject to regular reviews and will be updated from time to time as part of our continuing product development and improved spec accuracy.

Note 2: Operation beyond the quoted limits stated above may cause instantaneous and permanent damage.



| LNB Power                       |  |
|---------------------------------|--|
| Number of Single modules fitted | Total Power Available for LNB powering @ 18V |
| 16                              | 115 W  |
| 14                              | 120 W  |
| ≤ 13                            | Limited by module specifications             |
| Spec Version                    | 1.0  |
| Connector Options               |  |
| Connector Type                  | SRY-G1S-TS2-179-xxxx & SRY-G1S-RS2-180-xxxx  |
| SMA 50 Ohm & SC/APC             | SRY-G1S-TS2-179-S5SA & SRY-G1S-RS2-180-S5SA  |
| BNC 50 Ohm & SC/APC             | SRY-G1S-TS2-179-B5SA & SRY-G1S-RS2-180-B5SA  |
| BNC 75 Ohm & SC/APC             | SRY-G1S-TS2-179-B7SA & SRY-G1S-RS2-180-B7SA  |
| F-Type 75 Ohm & SC/APC          | SRY-G1S-TS2-179-F7SA & SRY-G1S-RS2-180-F7SA  |
| SMA 50 Ohm & FC/APC             | SRY-G1S-TS2-179-S5FA & SRY-G1S-RS2-180-S5FA  |
| BNC 50 Ohm & FC/APC             | SRY-G1S-TS2-179-B5FA & SRY-G1S-RS2-180-B5FA  |
| BNC 75 Ohm & FC/APC             | SRY-G1S-TS2-179-B7FA & SRY-G1S-RS2-180-B7FA  |
| F-Type 75 Ohm & FC/APC          | SRY-G1S-TS2-179-F7FA & SRY-G1S-RS2-180-F7FA  |

Note 1: The specification is subject to regular reviews and will be updated from time to time as part of our continuing product development and improved spec accuracy.  
Note 2: Operation beyond the quoted limits stated above may cause instantaneous and permanent damage.

