




RF Components

Variable Gain L-Band Amplifier

850 - 2150 MHz

Model Number:
A-VGAL1-3011

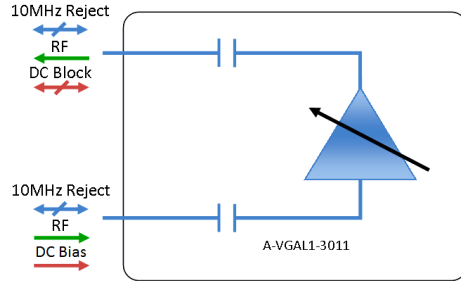

- 0 to 30dB gain settable in 1dB steps
- Built in regulator
- Requires 24V on input RF port
- 10MHz block on both ports, RF output is DC blocked and Input is DC Bias.

Available with RF connector options:

- 50 Ω SMA
- 50 Ω N-type
- 50 Ω BNC
- 75 Ω BNC
- 75 Ω F-type



Compact
Housed in rugged compact enclosure

Flexible Mounting
Tapped screw & through hole mounting options

850-2150 MHz
Operating frequency range. L-Band ready

RF Parameters					
A-VGAL1-3011-XXXX	S5S5	N5N5	B5B5	B7B7	F7F7
Frequency Range	850 - 2150 MHz				
RF Connectors	50Ω SMA	50Ω N-Type	50Ω BNC	75Ω BNC	75Ω F-Type
Gain (dB)	0 - 30	0 - 30	0 - 30	0 - 30	0 - 30
Gain vs Freq. variation (dB)	Typ.	± 0.8	± 0.8	± 1.0	± 1.2
	Max	± 1.2	± 1.2	± 1.4	± 1.5
Input Return Loss (dB)	Typ.	20	20	20	14
	Min	15	15	15	10
Output Return Loss (dB)	Typ.	20	20	20	14
	Min	15	15	15	10
Output P1dB GCP** (dB)	Typ.	15	15	15	15
	Min	12	12	12	12
Output IP3 (dBm)	Typ.	30	30	30	30
Noise Figure (dB)	Typ.	8	8	8	8

**Gain Compression Point

Broadcast



Marine Oil & Gas



SNG & VSAT



Satellite Teleport






RF Components

Model Number:
A-VGAL1-3011
Variable Gain L-Band Amplifier

Physical Dimensions (mm)

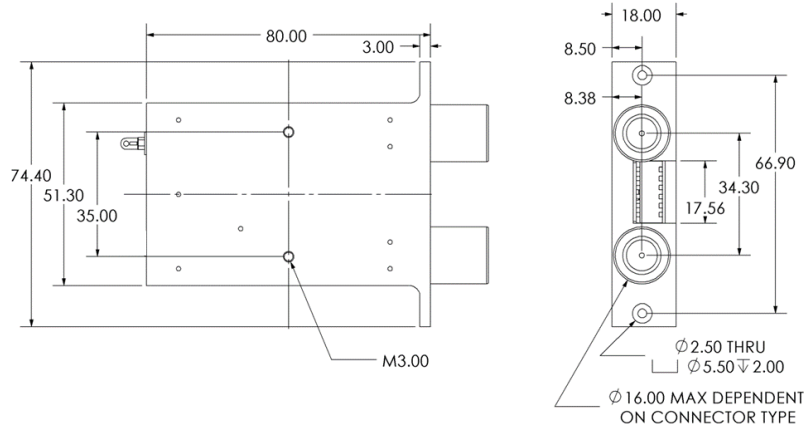

Environmental	
Operating Case Temperature	-10°C to +55°C
Storage Temperature	-20°C to +85°C
Location	Indoor use Only
Humidity	Max 85% non-condensing
Altitude	Max 10,000 feet

Max Operating Parameters	
Input RF Power	+24dBm (40mW)
DC Voltage	24V on input RF port
DC Current	500mA

! Operation beyond these limits may cause instantaneous and permanent damage.

Switch Settings	Gain Setting						Notes
	1	2	3	4	5	6	
Attenuation	16	8	4	2	1	n/a	Attenuation settings when the selected switch is at ON state
DC Injection	n/a	n/a	n/a	n/a	n/a	0 for DC OFF 1 for DC ON	Options A-VGAL1-3015 only
Max Gain	1	1	1	1	1	n/a	Max gain (0dB attenuation setting)
Min Gain	0	0	0	0	0	n/a	Min gain (31dB attenuation setting)



VGA Mounting Panel
 Now available for mounting in our Scorpion 19" 1U chassis
 Model: SCP-1U-10

Note: The specification is subject to regular reviews and will be updated from time to time as part of our continuing product development and improved specification accuracy.

ETL SYSTEMS LIMITED
 Coldwell Radio Station
 Madley
 Hereford
 England HR2 9NE

TELEPHONE
 +44 (0)1981 259020
 EMAIL
 info@etlsystems.com

FACSIMILE
 +44 (0)1981 259021
 WEB
 www.etlsystems.com