




RF Components

# IP67 4-Way L-Band Passive Splitter/Combiner

850 - 2150 MHz

Model Number:  
**ODU-2504**

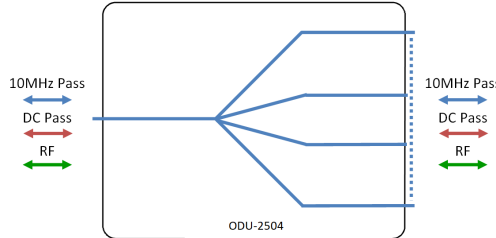

- DC & 10 MHz Pass on all ports
- Available with RF connector options:
- 50 Ω SMA
  - 50 Ω N-type
  - 50Ω TNC

**Compact & Waterproof**  
Housed in IP67 rated waterproof enclosure\*



**850-2150 MHz**  
Operating frequency range. L-Band ready

**Flexible Mounting**  
Through hole mounting options

RF Parameters				
ODU-2504-XXXX		S5S5	N5N5	T5T5
Frequency Range		850 - 2150MHz		
RF Connectors		50Ω SMA	50Ω N-Type	50Ω TNC
Mean Insertion Loss (dB)		0.8 ± 0.2	0.8 ± 0.2	0.8 ± 0.2
Flatness ± (dB)		0.5	0.5	0.5
Input Return Loss (dB)	Typ.	18	18	18
	Min	15	15	15
Output Return Loss (dB)	Typ.	19	19	19
	Min	17	17	17
Isolation (dB)	Typ.	28	28	28
	Min	20	20	20
Amplitude Balance (dB)		≤0.5	≤0.5	≤0.5

The given Insertion Loss specified is the loss above the theoretical limit for a lossless divider  
 10MHz Insertion Loss is up to 3dB above the theoretical loss\*  
 10MHz Rejection is 20dB\*  
 \*To ports which are applicable

## Broadcast



## Marine Oil & Gas



## SNG & VSAT



## Satellite Teleport



### Technical specifications and operating parameters



Environmental	
Operating Temperature	-40 to +85 °C
Storage Temperature	-50 to +100 °C
Location	Indoor/Outdoor IP67* use
Humidity	Max. 100% non-condensing
Altitude	Max. 12,000 feet Operational 40,000 feet Survival

Max Operating Parameters	
Input RF Power into matched load with 20dB return loss	+37dBm (5W) as splitter +27dBm (500mW) as combiner
DC Voltage	35V on any RF port
DC Current (pass)	3A
DC Consumption	N/A

\*IP67 integrity is maintained by populating all ports with sufficiently rated connectors and that unused ports have IP67 terminators or dust caps when awaiting connection. Dust caps are not sold with this product.

**!** Operation beyond these limits may cause instantaneous and permanent damage.

### Physical Dimensions (mm)

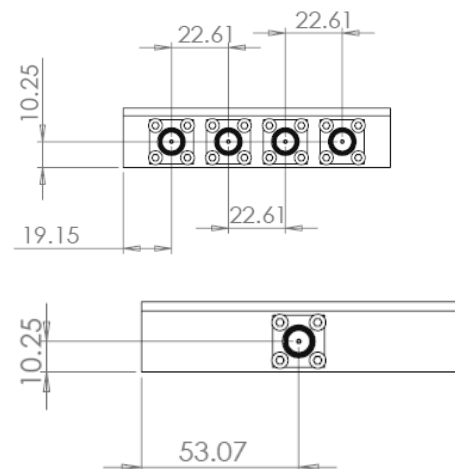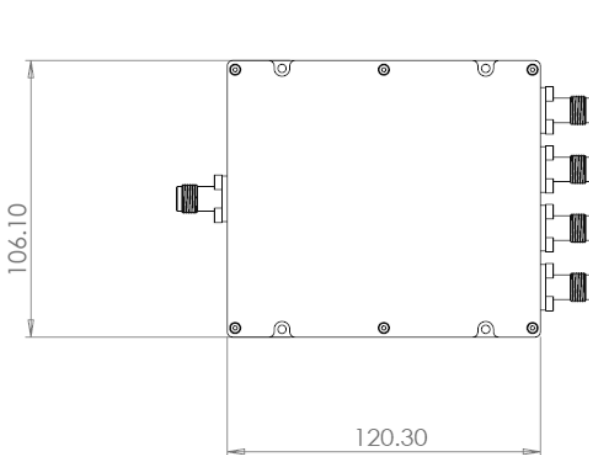

Note: The specification is subject to regular reviews and will be updated from time to time as part of our continuing product development and improved specification accuracy.