



Model Number:
DIV08L1A-2334

RF Components


8-way L-band Active Splitter

850 - 2150 MHz

- 10MHz/DC pass on port 1
- DC block on all other ports
- Unity gain
- Requires external DC bias

Available with RF connector options:

- 50 Ω SMA
- 50 Ω N-type
- 50 Ω BNC
- 75 Ω BNC
- 75 Ω F-type

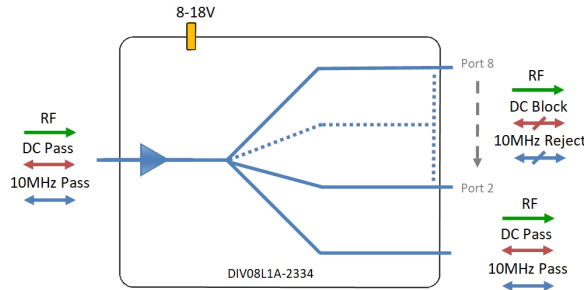

8-18V
External DC
powering

Compact
Housed in
rugged compact
enclosure

**Flexible
Mounting**
Tapped screw &
through hole
mounting options

850-2150 MHz
Operating frequency
range.



RF Parameters					
DIV08L1A-2334-XXXX	S5S5	N5N5	B5B5	B7B7	F7F7
Frequency Range	850—2150 MHz				
RF Connectors	50Ω SMA	50Ω N-Type	50Ω BNC	75Ω BNC	75Ω F-Type
Mean Gain (dB)	0 ± 2	0 ± 2	0 ± 2	0 ± 2	0 ± 2
Flatness ± (dB)	0.7	0.8	0.9	1.0	1.0
Input Return Loss (dB)	Typ.	18	18	14	12
	Min	14	14	12	10
Output Return Loss (dB)	Typ.	18	18	14	12
	Min	14	14	12	10
Output P1dB GCP** (dBm)	Typ.	5	5	5	5
	Min	2	2	2	2
Isolation (dB)	Typ.	25	25	25	25
Output IP3 (dBm)	Typ.	15	15	15	15
Noise Figure (dB)	Typ.	6	6	6	6
Amplitude Balance (dB)	≤ 0.5	≤ 0.5	≤ 0.5	≤ 0.5	≤ 0.5
Phase Balance (Φ)	≤ 5°	≤ 5°	≤ 5°	≤ 5°	≤ 5°

10MHz Rejection is 20dB*
*To ports which are applicable
**GCP (Gain Compression Point)

Broadcast



Marine Oil & Gas



SNG & VSAT



Satellite Teleport






RF Components


Model Number:
DIV08L1A-2334

8-way L-band Active Splitter


Technical specifications and operating parameters

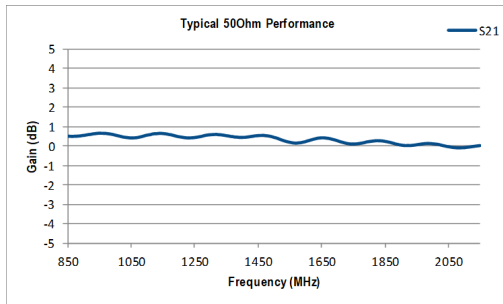

Gain (dB)

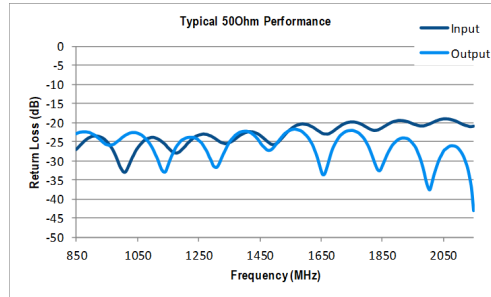

Return Loss (dB)

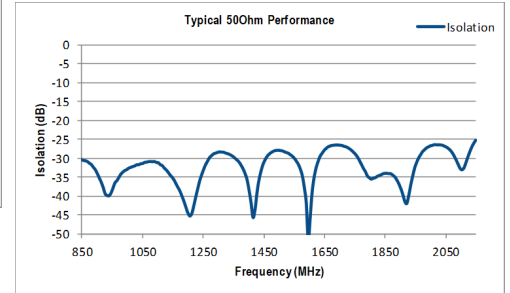


Isolation (dB)

Environmental		
Operating Temperature		0°C to +50°C
Storage Temperature		-40°C to +85°C
Location		Indoor use Only
Humidity	Max	80% non-condensing
Altitude	Max	10,000 feet

Max Operating Parameters	
Input RF Power	16 dBm
DC Voltage	18V
DC Current	Max
DC Consumption	

! Operation beyond these limits may cause instantaneous and permanent damage.

Physical Dimensions (mm)

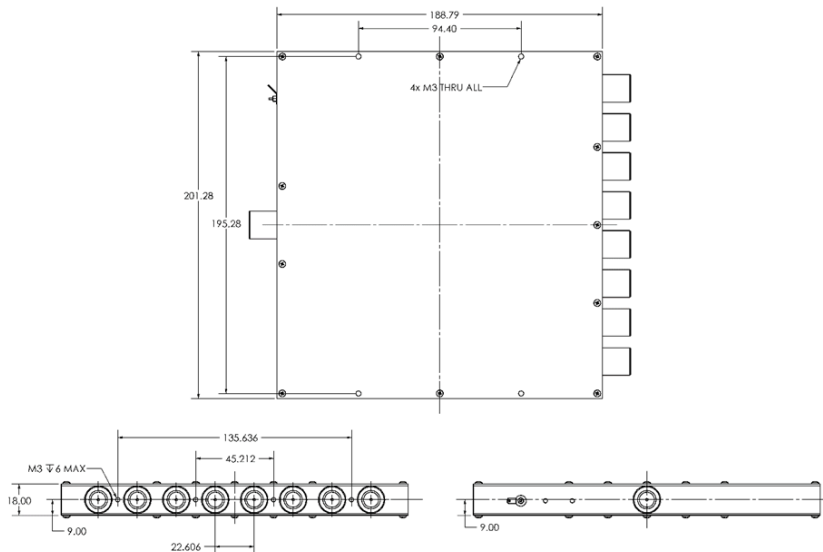

Note: The specification is subject to regular reviews and will be updated from time to time as part of our continuing product development and improved specification accuracy.

ETL SYSTEMS LIMITED
Coldwell Radio Station
Madley
Hereford
England HR2 9NE

TELEPHONE
+44 (0)1981 259020

EMAIL
info@etlsystems.com

FACSIMILE
+44 (0)1981 259021

WEB
www.etlsystems.com

