




GENUS DIGITAL RF over IP System

GENUS DIGITAL 5000 Series, model DI-G21-S2-5001-S5, is a full duplex 2 channel converter that digitises and reconstructs IF signals in the L-band range 850 to 2450MHz. The system provides up to 1GHz total instantaneous bandwidth via 2 x 512MHz channels at up to 12 bits bit depth. QSFP28+ IP 100GbE data connectors provide the full duplex operation to the DIFI standard IEEE-ISTO Std 4900-2021. Control & Monitor is via the front panel HMI or remotely via an RJ-45 1GbE ethernet link. The converter is housed in a 2U 19" chassis and benefits from field replaceable modules and dual redundant hot-swap power supplies. IF connectors are SMA 50 ohm.



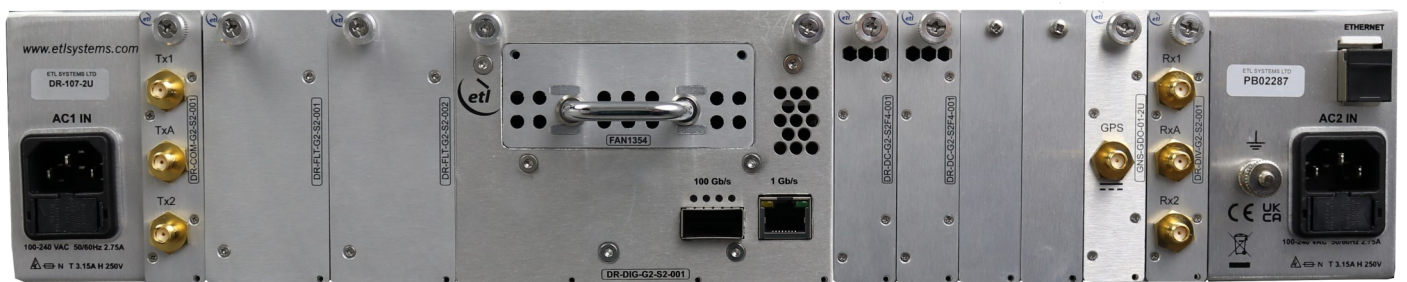

Technical specifications and operating parameters

Digital Parameters		
Rx Capacity	2 Channels ADC	
Tx Capacity	2 Channels DAC	
Instantaneous Bandwidth	512MHz per channel (DAC or ADC)	
Sample Rate	4 GSPS per channel, Input sample rate, excluding multirate signal processing	
Sample Depth	*12 bits, As transmitted over digital link	
Digital Data Transport	QSFP28, 100GbE SR4	
Data Protocol	(DIFI) IEEE-ISTO Std 2900-2021	
WAN Synchronization	GPS (10MHz, 1PPS, NMEA timecode) Enquire for other formats	
RF Parameters		
Frequency	850 to 2450MHz	
Gain	0±2dB Typical, mean across band	
Gain Flatness	Full band	±2.0dB
	500 MHz	±1.5dB
	Any 36MHz	±0.6dB
Input Return Loss	Typ.	17dB
	Min.	12dB
Output Return Loss	Typ.	17dB
	Min.	12dB
Noise Figure	26dB Typical	
Phase Noise (dBc/Hz)	Offset	PN
	100Hz	-62
	1kHz	-78
	10kHz	-89
	100kHz	-93
	1MHz	-106
	10MHz	-114

* 8 bits currently available





Technical specifications and operating parameters

RF Parameters	
OIP3	15dBm
SFDR	60dBc
GPS Input	Active Antenna (Provided)
Frequency Reference	10MHz
Input & Output ports	50Ω SMA
Input RF Power	0dBm
PSU Power	85-264Vac 50/60 Hz, absolute maximum
PSU Redundancy	Dual Redundant and Alarmed, Diode OR. Hot swap.
AC Consumption	~100W
Alarms	Via Ethernet PSU, Fan Status, others TBC
Remote Control & Monitoring	Ethernet (RJ45) on Rear Panel
MTBF	91164 hours
Environmental Conditions	
Operating Temperature	+40°C
Storage Temperature	-20°C to +75°C
Humidity	20 to 90% non-condensing
Altitude	10,000 feet AMSL
Physical Dimensions & Parameters	
Weight	<10kg
Dimensions	2U high x 550mm deep x 482.6mm wide
Front Panel Colour	RAL9003 – White (Semi-Matte)

Note 1: The specification is subject to regular reviews and will be updated from time to time as part of our continuing product development and improved specification accuracy.

Note 2: Operation beyond the quoted limits stated above may cause instantaneous and permanent damage.

Note 3: Typical parameters are guide figures and measured data may deviate from the quoted figures. ETL endeavours to exceed the quoted typical parameters where practically possible.

Note 4: Please see <https://www.etlsystems.com/legal-notices/> for IP rights and details.

Note 5: This product is Dual Use and subject to Export Control by the UK Government.

