



ETL Systems

New technologies
in RF distribution

Model Number: GNS-303-ODU

Genus Compact Outdoor Unit for 1U Modules

Flexible & resilient RF signal management

The Genus compact outdoor unit (ODU) is a weatherproof (IP65 rated) enclosure with a modular design which can house any combination of compatible Genus modules within the unit, supplying operators with a flexible and scalable solution, that reduces spare parts and space requirements.


The ODU chassis houses up to 8 RF modules including Amplifiers, BUC/LNB Power Supply's, Frequency Converters, Matrices, RF over Fibre and Test Loop Translators, which can be mixed. It has additional space for a 1+1 redundancy switch module.

The RF modules are field-serviceable and can be inserted whilst the ODU is in service, giving excellent levels of flexibility and resilience. With additional reliability from field serviceable RF modules and CPU.

ETL can offer AC to DC outdoor power supplies. Please enquire with ETL if required.

Typical applications:

- Teleports, ground stations, maritime high resilience applications and unmanned sites.
- High resilience RF distribution where single points of failure can be minimised.
- Redundancy applications for remote satellite teleports.
- V/HTS gateways
- Signal distribution – Amplifiers, BUC/LNB Power Supplies, Frequency Converters, Matrices, RF over Fibre, Redundancy Switches, Test Loop Translators are available.

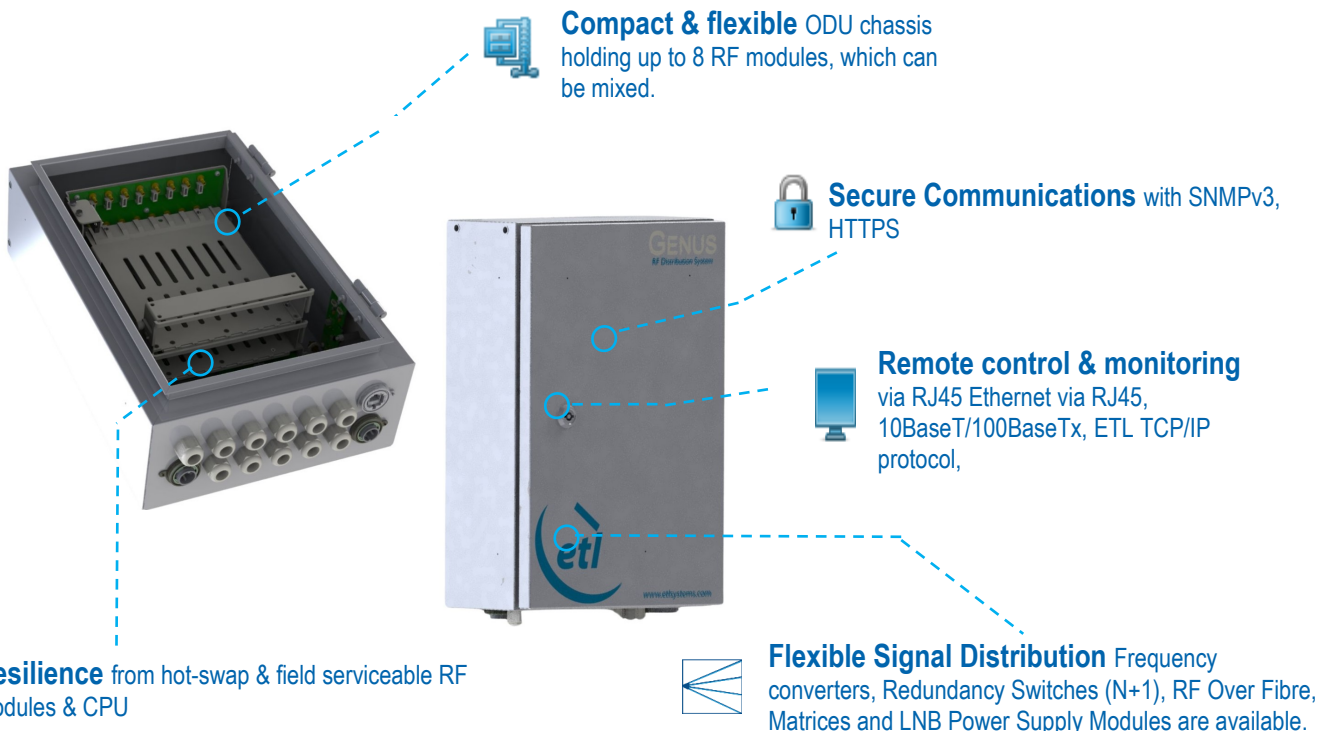

Resilience from hot-swap & field serviceable RF modules & CPU



Flexible Signal Distribution Frequency converters, Redundancy Switches (N+1), RF Over Fibre, Matrices and LNB Power Supply Modules are available.

ETL SYSTEMS LIMITED
Coldwell Radio Station
Madley
Hereford
England HR2 9NE

TELEPHONE
+44 (0)1981 259020

EMAIL
info@etlsystems.com

FACSIMILE
+44 (0)1981 259021

WEB
www.etlsystems.com





Preliminary technical specifications and operating parameters

General Specifications	
Capacity	Up to 8 RF 1U modules Note: Actual number dependent upon module type fitted. 1+1 redundancy configurations, please enquire.
Dimensions	450mm high x 300mm wide x 150mm
Weight	<10 kg
Colour	RAL9003 White (Semi-Matte)
AC Consumption	100W (max consumption at steady state)
DC Input	Dual 12VDC power inputs. (ETL can offer AC to DC outdoor power supplies. Please enquire with ETL if required)
10 MHz Distribution	If required please see datasheet for model GNS-393-ODU
Tech Spec Version	0.3

Environmental		
Operating temperature	-25°C to +60°C (Upper temperature may be derated dependant on module selection and loading. Max air ambient 55°C. Solar spot heating temperatures up to 60°C).	
Location	Outdoor or Indoor use, IP65	
Storage temperature	-40°C to +80°C (Not Powered)	
Humidity	20% - 100% non-condensing, Relative Humidity	
Altitude	Operational	10,000 ft AMSL (Above Mean Sea Level)
	Storage	30,000 ft AMSL (Above Mean Sea Level)

Reliability		
MTTR	15 minutes to replace. Assumes spares at hand. Applies to LRUs only and assumed in house stock.	
MTBF	Chassis	>250,000
	CPU	>250,000
Field serviceable components	RF modules, CPU & internal 10MHz reference source.	

Control & Monitoring	
Remote Control & Monitoring	Ethernet via RJ45, 10BaseT/100BaseTx ETL TCP/IP protocol SNMPv3 & HTTPS Built-in Web Server

RF Module Options						
Amplifier	BUC/LNB Power Supply	Frequency Converter	Matrices	Redundancy Switch	RF Over Fibre	Test Loop Translator (TLT)

Note 1: The specification is subject to regular reviews and will be updated from time to time as part of our continuing product development and improved spec accuracy.
 Note 2: Operation beyond the quoted limits stated above may cause instantaneous and permanent damage.
 Note 3: All specs are for 50 Ohm connectors unless detailed otherwise.

ETL SYSTEMS LIMITED
Coldwell Radio Station
Madley
Hereford
England HR2 9NE

TELEPHONE
+44 (0)1981 259020

EMAIL
info@etlsystems.com

FACSIMILE
+44 (0)1981 259021

WEB
www.etlsystems.com

